
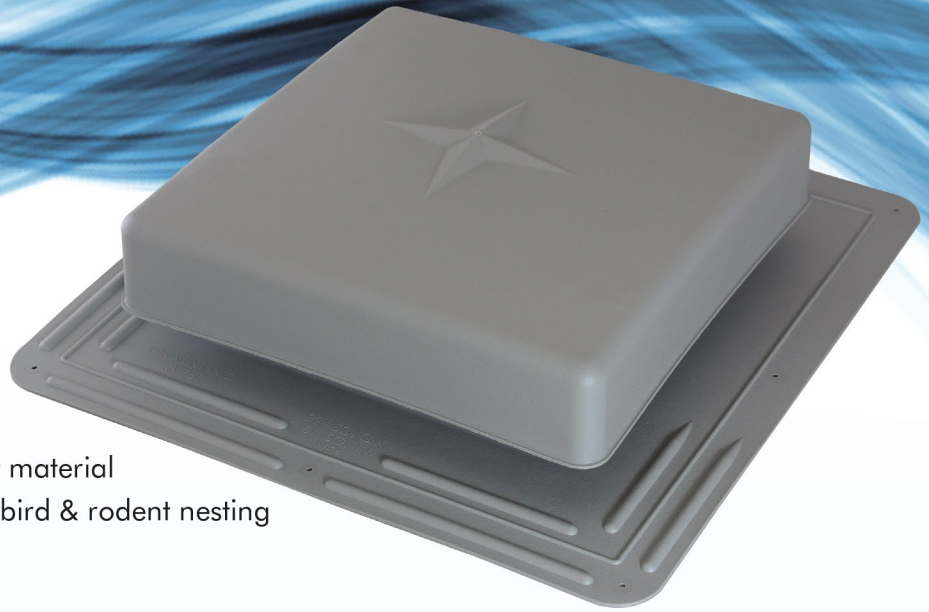


RVP61

SQUARE TOP PLASTIC ROOF LOUVER

- Rust-free plastic vent
- 17" x 18" flashing
- 9" square opening
- NFA: 61 Sq. In./Pc.
- Angled rain diverter throat
- Durable co-polymer UV/ hail-resistant material
- Strategically designed to help prevent bird & rodent nesting
- CSA Approved 



Black



Brown



Gray



Weatherwood

Color	Model	Part No.	PCS/CTN	CTNS/Pallet
Black	RVP61BL	90155	10	16
Brown	RVP61BR	90156	10	16
Gray	RVP61GR	90157	10	16
Weatherwood	RVP61WW	90159	10	16

Net Free Area of Vent	1000 Sq. Ft.	1500 Sq. Ft.	2000 Sq. Ft.	2500 Sq. Ft.
61 Sq. in.	4	6	8	10

- Use this chart to determine the number of vents your attic requires (minimum code requirement).
- Air Vent suggests installing more louvers than the minimum code requirement.
- 3/12 to 12/12 roof pitch.
- An attic requires an equal amount of intake (soffit) and exhaust (roof) ventilation.

